

ADVANCED LINE TECHNOLOGY    ADVANCED LINE TECHNOLOGY    ADVANCED LINE TECHNOLOGY    ADVANCED LINE TECHNOLOGY  
ULTRA STRONG & SOFT MONOFIL    ULTRA STRONG & SOFT MONOFIL    ULTRA STRONG & SOFT MONOFIL    ULTRA STRONG & SOFT MONOFIL

## FLEXIPLUS<sup>®</sup> MATCH BI-COLOR Brown Black

150M / 165Yds

EXCEPTIONALLY ULTRA STRONG & EXTRA SUPPLE MONOFIL

**EXTRA STRONG & ULTRA SOFT**  
**TROUBLE FREE LINE TWISTING TFLT**  
**MULTI-COATED COPOLYMER**  
**MEMORY FREE**  
**2 COLORS : BROWN / BLACK BRIGHT**

**PARALLEL WINDING SPIRES JOINTIVES PW-S<sup>®</sup>**

**Fil polyvalent à Très Haute Résistance : 2 Couleurs**

Ultra Souple & Super Glisse grâce au procédé **Multi-Coating MC<sup>2</sup>**

La technologie numérique de bobinage orienté à **Spires Jointives PW-S<sup>®</sup>** supprime les problèmes de **Vrillage & Torsion** du fil et réduit également la tension de bobinage.  
**Au déroulage, le fil reste droit.**

Très Lisse & Brillant / Toucher Soyeux / Camouflage 2 couleurs

Sans Mémoire / Tension Contrôlée & Régulée **NSCTsystem<sup>®</sup>**

**PW-S<sup>®</sup> PARALLEL WINDING**

**A polyvalent Mono Ultra Strong & Supple : Duo Color**

Thanks to its advanced technology, this line combines both advantages to be Amazingly **Strong** and **Powerful** and **Ultra Supple**.

The **Multi-Coating** process **MC<sup>2</sup>** soften the line and gets it very smooth and his advanced copolymer formula add toughness and abrasion resistance.

**Trouble Free Casting & Twisting** due to Digital Precision Winding Process **PW-S<sup>®</sup>** allow easy and accurate casting. When using, the line keeps straight without any twisting or torsion.

**No Stretch & Controlled Tension NSCTsystem<sup>®</sup>**


## FLEXIPLUS<sup>®</sup> MATCH BI-COLOR Brown Black

100M / 150M / 300M / 500M / 1000M

**PW-S<sup>®</sup> PARALLEL WINDING**

Ømm	0,14	0,16	0,18	0,20	0,225	0,25	0,28	0,30	0,35	0,40	0,45	0,50	0,55	0,60
M	150	150	150	150	150	150	150	150	150	150	150	150	100	100
KG Test *	1,6	2	2,5	3	4	5	6,2	7,3	9,6	12,8	15,2	19,3	22,8	24,9
Lb Test *	3,5	4,4	5,5	6,6	8,8	11	13,7	16,1	21,2	28,2	33,5	42,5	50,3	54,9
Code Item	PPW-FXP-MBC-014/150	PPW-FXP-MBC-016/150	PPW-FXP-MBC-018/150	PPW-FXP-MBC-020/150	PPW-FXP-MBC-0225/150	PPW-FXP-MBC-025/150	PPW-FXP-MBC-028/150	PPW-FXP-MBC-030/150	PPW-FXP-MBC-035/150	PPW-FXP-MBC-040/150	PPW-FXP-MBC-045/150	PPW-FXP-MBC-050/150	PPW-FXP-MBC-055/150	PPW-FXP-MBC-060/100

\*linear strenght

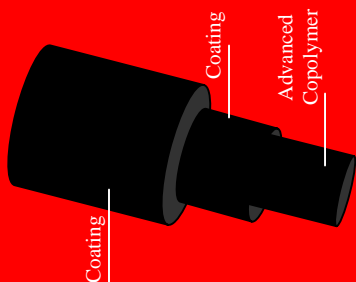

**Multi-Coating Process MC<sup>2</sup>**



FLEXIPLUS<sup>®</sup> PARALLEL ELIUM PRECISION WINDING<sup>®</sup> are Registered trade marks of ADVANCIUM TECHNOLOGIES